

# Vigilant Hardware Versions

## Vigilant Permanent



- 8 high-speed (Dynamic) multipurpose analog inputs;
- 4 channels (Temp/Tach/Process);
- ICP power source available on all dynamic inputs;
- Ethernet TCP/IP communications;
- Powered at +24 Vdc.



## Vigilant Mobility

- Same function as Vigilant Permanent;
- Packaged in rugged, custom waterproof case;
- Designed to travel to off-site assets;
- Install on assets in alarm to closely monitor until planned shutdown.

# Technical Specifications

General		Signal acquisition: Main inputs	
Function	Permanent acquisition device	Sampling rate	512 Hz to 51.200 Hz
Main dynamic inputs	8 channels (ultrasound & vibration)	DC range	± 24 V
Auxiliary static inputs	4 channels (static & tachometers)	AC range	24 Vpp
USB ports	1 Host	IEPE Sensors drive current	5.5 mA @20V
Analog channels indicator	12x Red/Green LEDs	ADC resolution	16 bits
Power supply	20-26 Vdc, 24 Vdc nominal (220 V AC with the mobility case)	Input configuration mode	Dynamic, Static, Digital, Pulse train
Power consumption	<12W	Harmonic distortion	-70 dB
System features		Accuracy	1 %
Operating system	Dedicated webserver application	Dynamic range	110 dB
CPU	ARM Cortex™-A9 Quad Core (NVIDIA® Tegra™ 3)	Gain	1 to 128
Storage capacity	4 GB	Points type	Dynamic, Static, Tachometer
Network interface	IEEE1588 Ethernet 10/100 (WIFI/Cellular using an optional module)	Signal acquisition: Auxiliary inputs	
Communication	MODBUS TCP & OPC UA	Sampling rate	Up to 200 Hz
Mechanical features		DC range	± 24 V
Mounting	Standard 35 mm DIN rail (plug&play mobility case in option)	ADC resolution	16 bits
Sensor interface	Free-end cable (back panel + provided connectors of type M8 for the mobility case)	Power output	+24 V
Size	162.2x95x27 mm (out of mobility case)	Input configuration modes	Static, Digital, Pulse Train (A1 and A2 only)
Weight	0.42Kg	Accuracy	1%
Operating temperature range	-30C° to +44.5C°, non-condensing	Gain	1 to 32
Humidity	95% RH	Points type	Static, Tachometer
		Signal processing	
		Spectral lines	Up to 12800
		Time waveform samples	128 up to 262.016
		Windows type	Hann, Hamming, Blackman, Rectangular
		Processing modes	Waveform, Spectrum & Waveform, Demodulation, Long Waveform, Demodulation, Long-Waveform
		Available filters	Butterworth, Bessel, Chebyshev

## SDT Mission

SDT provides ultrasound solutions that help our customers gain a better understanding about the health of their factory. We help them predict failures, control energy costs, and improve product quality while contributing to the overall reliability of their assets.

Your SDT Certified Partner  
**Precise Reliability**  
 75 Clairedan Dr., Suite A  
 Powell, OH 43065  
 614-376-4078  
 info@precisereliability.com



**SDT International s.a./n.v.**  
 Bd de l'Humanité,415  
 B-1190 Brussels - Belgium  
 Tél: +32(0)2-332 32 25  
 Email: info@sdtultrasound.com

**SDT North America**  
 7677 County Road 2, Cobourg, ON K9A 0X4 Canada  
 Toll Free NA: 1-800-667-5325  
 Intl Phone: 1-905-377-1313  
 Email: hearmore@sdtultrasound.com

[www.sdtultrasound.com](http://www.sdtultrasound.com)

# VIGILANT

Powered by SDT

Online  
 Condition  
 Monitoring

## Be Vigilant over your critical assets

- Ultrasound
- Vibration
- Temperature
- Tachometer
- Process




[bevigilant.io](http://bevigilant.io)





A turn-key condition monitoring solution combining the versatility of ultrasound, the analytics of vibration, standard communication protocols and an embedded trending and analysis software.

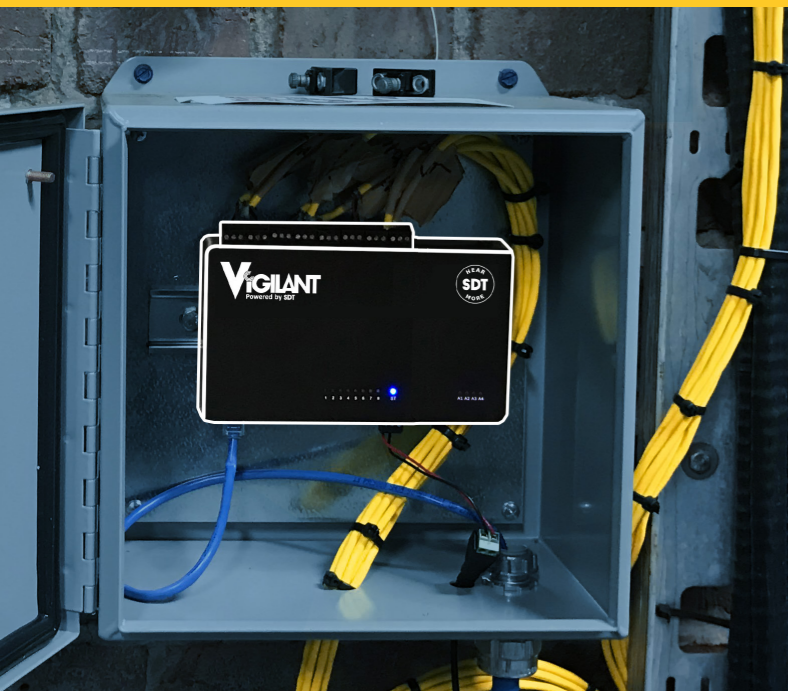

### Configure Vigilant to any Critical Asset

Vigilant is a flexible data collection pod. Input any combo of eight ultrasound and vibration sensors and receive continuous feedback from your assets.

4 channels for Temperature, Tach and Pressure create an all-in-one solution for critical and guarded assets.


### Designed for COMMONSense

Vigilant accepts data from commonly available sensors including the COMMONSense Sensors from SDT, designed to provide repeatability in any industrial environment.



### Vigilant Highlights:

- 8 channels (Ultrasound or Vibration)
- 4 channels (Temp/Tach/Process)
- Embedded data management software
- Trends/Spectrum/Waveform/Waterfall
- Open communications protocol
- Static and Dynamic data

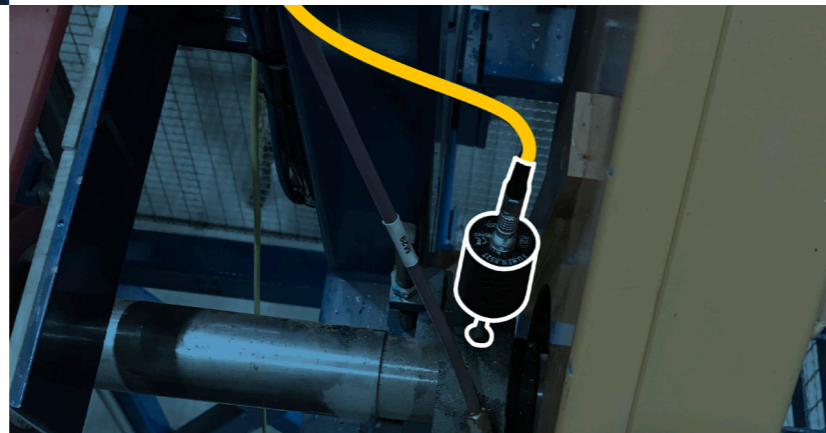

## Embedded Data Management Software

View the status of any asset from the security and convenience of your favourite web browser.

### Configuration

Vigilant includes a web interface to configure all the system options and monitoring features available on the units.

### Dashboard

The Dashboard visualizes the real time measurements performed by the Vigilant. It also shows the historical data stored in the unit.

### Alarm Log

From any of the desktops the users have access to the "Alarm Log" that shows all the events or anomalies detected in the monitored machine in real-time.

### Widgets

Widgets for static trends, dynamic time waveform plots, as well as spectral analysis.

### Layouts

Size, position, and arrange widgets to create custom desktop layouts.



Vigilant manages both Static and Dynamic ultrasound data. This creates an opportunity to establish long-term trending, analysis, and diagnosis at the earliest point in the failure curve.

## Applications

- Early detection of rolling element bearing faults (especially in slow speed applications);
- Status of couplings on critical assets in limited access locations;
- Monitor guarded assets such as robotics or CNC machine centres;
- Lubrication status of roller bearings;
- Valves deemed critical to a process;
- Detection of partial discharge in electrical assets such as MCC panels and switchgear cabinets;
- Detection of friction or impacting in linear motion applications;
- Detection of turbulence produced by cavitation in pumps and valves;
- Detection of hydro-cyclones used in mining processes.

